


## LED Linear Luminaire Part Number Configurator

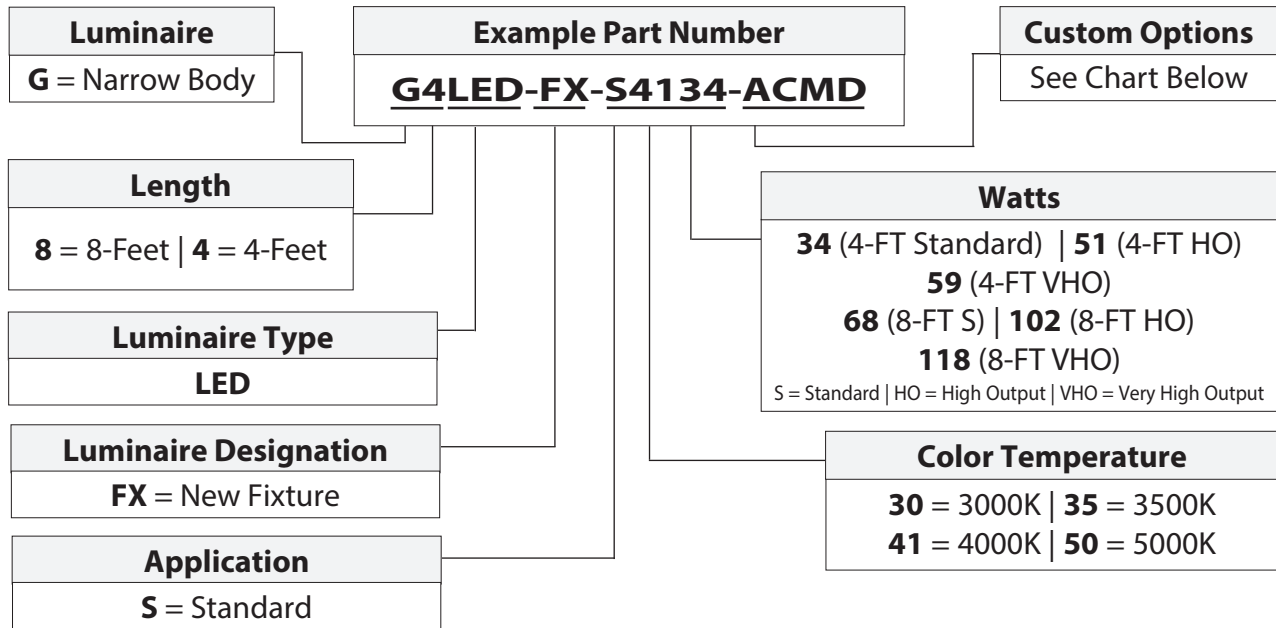

Luminaire Options	
Option	Notes
A. 6-Foot Power Cord (PSS6)	Straight Plug, 13 AMP
A1. 6-Foot Twist Lock Power Cord	L5-15P, 120V
A2. 6-Foot Twist Lock Power Cord	L7-15P, 277V
C. Acetal (Plastic) Latches	Not recommended for the following applications: Swimming Pools, Car Washes, Food Processing (because of the cleaning chemicals), or Agriculture (because of the ammonia)
S. Stainless Steel Latches	Withstands extreme temperatures for refrigerator and freezer applications, as well as the chemicals present in car washes. SSL are also impervious to acidic conditions making them suitable for use in livestock containment buildings.
D. Dim to Off	Lighting system dimming controller dims to off.
E. Emergency LED Backup Driver	Call EPCO Inside Sales for lead time
L. Luminaire Disconnect	Luminaire Disconnect standard on all LED Luminaires.
M. Ceiling and Wall Mount Mounting Hardware	Powder Coated (Not National Sanitation Foundation approved for food service applications)
M1. Ceiling and Wall Mount Mounting Hardware	Stainless Steel (National Sanitation Foundation approved)
M2. 45-Degree Mounting Hardware	45-Degree Angle Stainless Steel (National Sanitation Foundation approved)
<b>Occupancy Sensors</b> R1. Passive infrared – Dry Locations R2. Passive infrared – Dry/Cold Locations R3. Passive infrared – Wet Locations R4. Microwave – On/Off Only R5. Microwave – 0-10V Dimming, 30% R6. Microwave – 0-10V Dimming, 50%	Two Occupancy Sensors Types available: <ul style="list-style-type: none"> <li>■ <b>High/Medium Bay Passive Infrared (PIR) Occupancy Sensors:</b> Recommended for ceiling heights 15-feet or higher. PIR sensors function as an automatic lighting control in high and medium bay applications.</li> <li>■ <b>Microwave Sensors:</b> Recommended for ceiling heights 15-feet or lower. The microwave sensor detects the slightest movement in the occupancy zone. Detection is sensed through doors, glass, or thin walls. <b>Note:</b> Long Lead Times.</li> </ul>
<b>Surface Mount Bracket</b> Y1 (4-feet). Large and Small Bracket Y2 (4-feet). Large Bracket Y1 (8-feet). Large and Small Bracket Y2 (8-feet). Large and Small Bracket Y3 (8-feet). Large and Small Bracket (2)	Allows installation of a luminaire directly under or over a junction box to surface mount to a ceiling or wall. Provides a water and bug resistant seal protecting the critical area between the junction box's supply conductors and the luminaire. No adhesive sealant or gasket material is required. EPCO will pre-drill a hole in the luminaire housing at designated locations to facilitate pulling the supply conductors from the junction box and into the luminaire housing.
Z. Bulk Packaging	25 or 50 per skid (eliminates individual carton packaging on the job site).